


# LOMANCO® Lo-OmniRoll®


## The Rollable, Gunnable and Functional Ridge Vent.

Use with Lomanco intake vents for a complete ROOF VENTILATION SYSTEM!

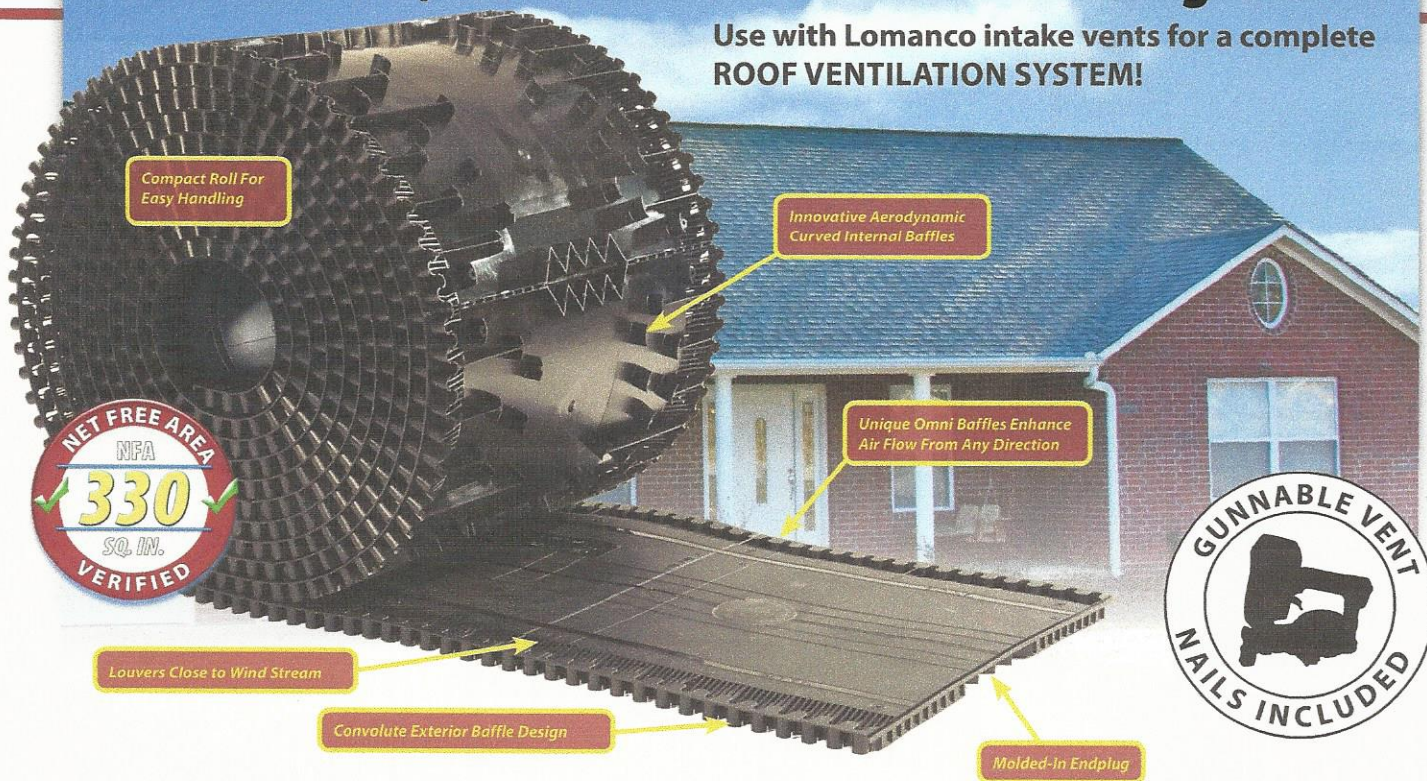

### LOR-30 FEATURES:

- ▶ Pneumatic nail gun or hammer installed.
- ▶ Two coils of 1¼" nails provided.
- ▶ Patented design brings you the truly functional roll out.
- ▶ Compact 30 foot roll is easy to handle.
- ▶ Superior weather protection and performance with no filter to clog.
- ▶ Exterior convolute baffles - incurved design allows flexibility to roll up and out while maintaining its shape.
- ▶ Can be cut at one foot intervals - multiple cut lines eliminates unnecessary scrap.
- ▶ Patented molded fanfold end plugs - no accessories or alterations needed.
- ▶ Molded centerline for fast and easy alignment.
- ▶ Field tested design - proven effective under all weather conditions.
- ▶ The air flow acceleration design - maximizes ventilation capacity.
- ▶ Omni baffles signify air flow from any direction.
- ▶ Nail holes marked every 6 inches - supported every foot - will not crush down.
- ▶ Full 11 square inches of net free area per linear foot.
- ▶ Engineered material guarantees longevity.
- ▶ **Lifetime Limited Warranty.**



### LOR-30 Ventilation Guide

(Attic floor space) in square feet

Area Ventilated	1000	1500	2000	2500	3000	3500
Required length(feet)	22	33	44	55	66	77
Intake Required(in <sup>2</sup> )	242	363	484	605	726	847

Based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space.

Model	Length (ft.)	NFA (in. <sup>2</sup> )	Roof Pitch	CFM at Wind Velocity of		
				3 MPH	8 MPH	15 MPH
LOR-30	30'	330	2/12 To 16/12	52	148	283

Above CFM are per 4-Ft. Sections

LO448\_0913



Want more info?  
Scan this QR code with your smartphone.

Like us on Facebook

Follow us on Twitter



1.800.643.5596 • Lomanco, Inc. • www.lomanco.com



### LomanCool™ 2000

- ▶ Deep drawn flange and unique rain shield keep water out.
- ▶ 8x8 aluminum screen attached for insect protection.
- ▶ Factory-set adjustable thermostat (switches on at 100 degrees and off at 85 degrees).
- ▶ Thermostat features a "push-to-test" button.
- ▶ 2000TH model is equipped with thermostat/humidistat combo switch.
- ▶ Adjustable humidistat settings are: minimum 80%, normal 42%, and maximum 20%.
- ▶ 5 Year Limited Warranty.

Colors Available:



2000

Cutaway View  
2000TH

How many Power Vents do you need?

Your attic floor space to be ventilated in square feet.

	1000	1500	2000	2500	3000	3500
2000/2000TH	1	2	2	3	3	4
1800	1	NR	NR	NR	NR	NR


Copper 2000/2000TH



Available on special order

### Add-A-Vent 1800

- ▶ Factory-set adjustable thermostat (switches on at 100 degrees and off at 85 degrees).
- ▶ Can be mounted in horizontal or vertical position on either 16" or 24" center framing members.
- ▶ Optional humidistat is adjustable to fit individual attic humidity levels.
- ▶ Designed to mount behind existing gable louver.
- ▶ 5 year limited warranty.

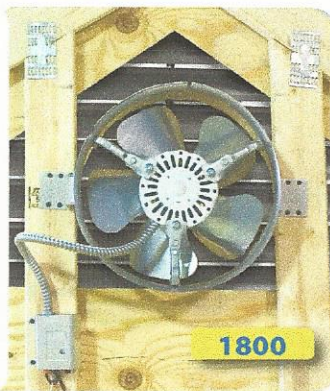

1800

MIAMI-DADE COUNTY  
APPROVED

LomanCool 2000

CSA  
Approved

LomanCool 2000, 1800

Texas Department of  
Insurance "Windstorm"  
Approved

LomanCool 2000

UL  
All Models



Want more info?  
Scan this QR  
code with your  
smartphone.

Model	Amps	Motor		Volts	Base (in.)	Fan Blades	
		HP	RPM			No.	DIA. (in.)
2000	3.4	1/10	1100	120	20 x 23	5	12
2000TH	3.4	1/10	1100	120	20 x 23	5	12
1800	3.4	1/10	1100	120	—	5	12

LO476\_0113

Find us on  
**Facebook**


Follow us on  
**Twitter**



1.800.643.5596 • Lomanco, Inc. • lomanco.com



# Whirlybird® Turbine Ventilators

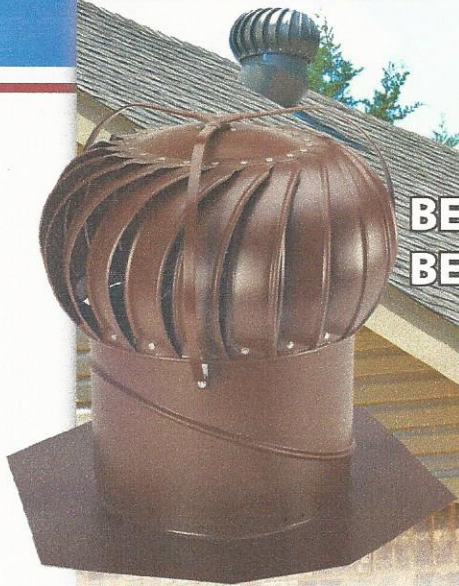

**BEB-12**  
**BEB-14**

**BIB-12**  
**BIB-14**

**foreverguarantee**  
The Quality & Performance of the Lomanco®  
Whirlybird® Turbine is Guaranteed Forever

## COMMON FEATURES:

- ▶ Reduces energy bills.
- ▶ Easy installation.
- ▶ Forever Guarantee - residential use only.
- ▶ Permanently lubricated upper and lower ball bearings that ensure long life and no maintenance.
- ▶ All-aluminum rust-free construction.
- ▶ Rigid spider-type structure.
- ▶ Riveted at every connection.
- ▶ 21 air-foil curved vanes with rolled edges to deflect water.
- ▶ Exclusive vari-pitch base adjusts to 12/12 roof pitch.†
- ▶ Large flashing for easy installation.
- ▶ Tested to withstand winds of 110 m.p.h.
- ▶ Reduces winter ice build up.
- ▶ Big Whirly - 14" moves up to 37% more air than the 12".

COLORS AVAILABLE - B SERIES



Weathered Bronze

White

Black

Brown

Mill Finish

## Hurricane caps available!

Model	Hole Size	Height	Base
BIB-12*	12	17¼	20 x 20
BEB-12*	12	17½	20 x 20
BIB-12TR*	12	20¼	20 x 20
BEB-12TR*	12	20½	20 x 20
BIB-14*	14	20	22 x 22
BEB-14*	14	20½	22 x 22
GT-12	12	15¾	20 x 20
GEB-12	12	16	20 x 20



**GEB-12 & GT-12**(shown)  
GALVANIZED STEEL TURBINE  
†ADJUSTS TO 7/12 ROOF PITCH  
AVAILABLE IN MILL ONLY

## Ventilation Calculator

How many Whirlybirds® do you need?

Your attic floor space to be ventilated in square feet.

1000 1500 2000 2500 3000 3500

### TURBINE VENT EXHAUST SYSTEM

Turbine Size	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"
12"	2	2	3	4	4	5				
14"	2	2	2	3	3	4				


### TURBINE VENT INTAKE SYSTEM

Turbine Size	12"	14"	12"	14"	12"	14"	12"	14"	12"	14"
C416	21	29	21	29	32	29	42	43	42	43
C616	15	20	15	20	22	20	29	29	29	29
C816	9	11	9	11	13	11	17	17	17	17
105/190	8	10	8	10	11	10	15	15	15	15
140	6	9	6	9	9	9	12	13	12	13
SV-10	9	12	9	12	13	12	17	17	17	17

## BEARING FACTS

Molded and fully machined raceways - not merely molded. Concentric to .0015 for low drag and quiet operation.

DuPont Delrin® inner and outer bearing rings - the longest lasting and smoothest polymer ball bearing material available.



Unique Turcon® permanently seals lubricant in and dirt and moisture out.

100 Grade 302 series stainless steel balls for low turning resistance and high resistance to moisture.

### All B Series Turbines

MIAMI-DADE COUNTY  
APPROVED

Lomanco, Inc.  
Jacksonville, AR



\*Texas Department of Insurance "Windstorm" Approved - Report # RV-12

Find us on  
**Facebook**

Follow us on  
**Twitter**

1.800.643.5596 • Lomanco, Inc. • www.lomanco.com



# LOMANCO

# OmniRoll®




## The Rolled Vent That Works!

Use with Lomanco intake vents for a complete **ROOF VENTILATION SYSTEM**

### OR-20 FEATURES:

- ▶ Patented design brings you the truly functional roll out.
- ▶ Compact 20 foot roll is easy to handle.
- ▶ Superior weather protection and no filter to clog.
- ▶ Exterior convolute baffles incurved design allows the flexibility to roll up and out while maintaining shape.
- ▶ Can be cut at one foot intervals, multiple cut lines eliminate unnecessary scrap.
- ▶ Patented molded fanfold end plugs, no accessories or alterations needed.
- ▶ Field tested design - the air flow acceleration design - maximizes ventilation capacity.
- ▶ Omni baffles mean air flow from any direction.
- ▶ Supported nail holes, placed every foot, will not crush down.
- ▶ Full 18 square inches of Net Free Area per linear foot.
- ▶ Engineered material guarantees longevity.
- ▶ **Lifetime Limited Warranty.**



### OR-20 Ventilation Guide

(Attic floor space) in square feet

Area Ventilated	1000	1500	2000	2500	3000	3500
Required length(feet)	14	20	27	34	40	47
Intake Required(in <sup>2</sup> )	252	360	468	612	720	846

Based on the IRC/FHA standard of one square foot of ventilation for every 300 square feet of attic floor space.

Model	Length (ft.)	NFA (in. <sup>2</sup> )	Roof Pitch	CFM at Wind Velocity of		
				3 MPH	8 MPH	15 MPH
OR-20	20'	360	2/12 To 16/12	95	235	430

Above CFM are per 4-Ft. Sections



Want more info?  
Scan this QR code with your smartphone.

LO447\_0113

Find us on **Facebook**

Follow us on **Twitter**



1.800.643.5596 • Lomanco, Inc. • [lomanco.com](http://lomanco.com)